

(19)



KOREAN INTELLECTUAL PROPERTY OFFICE

KOREAN PATENT ABSTRACTS

(11)Publication number: **1020010017115 A**

(43)Date of publication of application: **05.03.2001**

(21)Application number: **1019990032464**

(22)Date of filing: **07.08.1999**

(71)Applicant: **KOREA ADVANCED INSTITUTE
OF SCIENCE AND
TECHNOLOGY**

(72)Inventor: **HAN, CHEOL HUI
JUNG, HUN JU
LEE, SEUNG U**

(51)Int. Cl. **G09G 3/36**


**(54) CIRCUIT OF DIGITAL DRIVING FOR LIQUID
CRYSTAL DISPLAYER**

(57) Abstract:

PURPOSE: A circuit of digital driving for a liquid crystal displayer is provided to reduce the number of data bus lines and data latches by managing the information about bits of the digital image information in order according to time.

CONSTITUTION: The device includes the first data latch(31), a shift register(33), the second data latch(32) and a digital/analog converter(34). The first data latch(31) stores the data of the digital image information in order through a data bus. The shift register(33) locks the operation of the first data latch(31) to the location of the digital image information input from the outside. The second data latch(32) stores the digital information stored in the first data latch(31) before converting into analog. The digital/analog converter(34) inputs the data of the digital image information stored in the second data latch(32) in order each bit and converts them into the analog signal.

COPYRIGHT 2001 KIPO

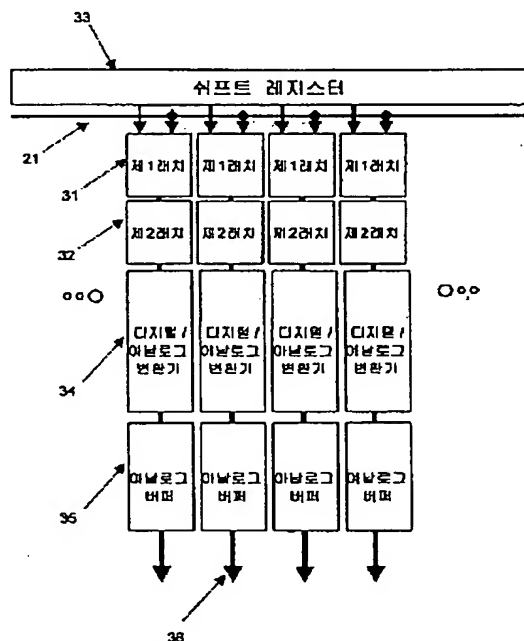

© EPODOC / EPO

PN - KR20010017115 A 20010305
 TI - CIRCUIT OF DIGITAL DRIVING FOR LIQUID CRYSTAL DISPLAYER
 AB - PURPOSE: A circuit of digital driving for a liquid crystal displayer is provided to reduce the number of data bus lines and data latches by managing the information about bits of the digital image information in order according to time. CONSTITUTION: The device includes the first data latch(31), a shift register(33), the second data latch(32) and a digital/analog converter(34). The first data latch(31) stores the data of the digital image information in order through a data bus. The shift register(33) locks the operation of the first data latch(31) to the location of the digital image information input from the outside. The second data latch(32) stores the digital information stored in the first data latch(31) before converting into analog. The digital/analog converter(34) inputs the data of the digital image information stored in the second data latch(32) in order each bit and converts them into the analog signal.
 EC - G09G3/36C14A
 ICO - S09G213/14B
 PA - KOREA INST SCIENCE TECHNOLOGY [KR]
 IN - HAN CHEOL HUI [KR]; JUNG HUN JU [KR]; LEE SEUNG U [KR]
 AP - KR19990032464 19990807
 PR - KR19990032464 19990807
 DT - II
 FAMN- 19606506
 IC - G09G3/36
 ICAI - G09G3/36
 ICCI - G09G3/36
 LA - en
 NPR - 1
 OPD - 1999-08-07
 PD - 2001-03-05

© WPI / Thomson

AN - 2001-606027 [69]
 TI - Circuit of digital driving for liquid crystal display
 AB - NOVELTY :
 A circuit of digital driving for a liquid crystal display is provided to reduce the number of data bus lines and data latches by managing the information about bits of the digital image information in order according to time.
 - DETAILED DESCRIPTION :
 The device includes the first data latch(31), a shift register(33), the second data latch(32) and a digital/analog converter(34). The first data latch(31) stores the data of the digital image information in order through a data bus. The shift register(33) locks the operation of the first data latch(31) to the location of the digital image information input from the outside. The second data latch(32) stores the digital information stored in the first data latch(31) before converting into analog. The digital/analog converter(34) inputs the data of the digital image information stored in the second data latch(32) in order each bit and converts them into the analog signal.
 IW - CIRCUIT DIGITAL DRIVE LIQUID CRYSTAL DISPLAY
 PN - KR20010017115 A 20010305 DW200169
 KR100345285B B 20020725 DW200308
 US6747625 B1 20040608 DW200437
 IC - G09G3/36
 ICAI - G09G3/36
 ICCI - G09G3/36
 MC - T04-H03B T04-H03C2A
 DC - P85
 - T04

PA - (KOAD) KOREA ADV INST SCI & TECHNOLOGY
IN - CHUNG H; CHUNG H J; HAN C; HAN C H; JUNG H J; LEE S; LEE S U; LEE S W
AP - KR19990032464 19990807; US20000628040 20000727; [Previous Publ KR20010017115 A 00000000]
PR - KR19990032464 19990807

